




Silver case, glass sealed, Tubular, Axial leads, High temperature sleeve, Polar
 Good electric performance, High reliability, long life, Low DF and LC.
 High temperature performance, Can use at 175
 Suit for down-hole-drilling instrumentation and high temperature
 electronic devices DC or pulse circuit.
 Implementation of standards QJ/PWV223-2008



Operation temperature: -55 ~+175 (>155 use derated Voltage)
 Capacitance Tolerance:K= ±10% M=±20% Q=-10%~+30%
 Dissipation Factor: 25 100Hz (see table 2)
 leakage current
 25 I 0.002CRUR μA or 2μA (whichever is greater)
 85 I 0.01CRUR μA or 10μA (whichever is greater)
 175 I 0.03 CRUR μA or 30μA (whichever is greater)

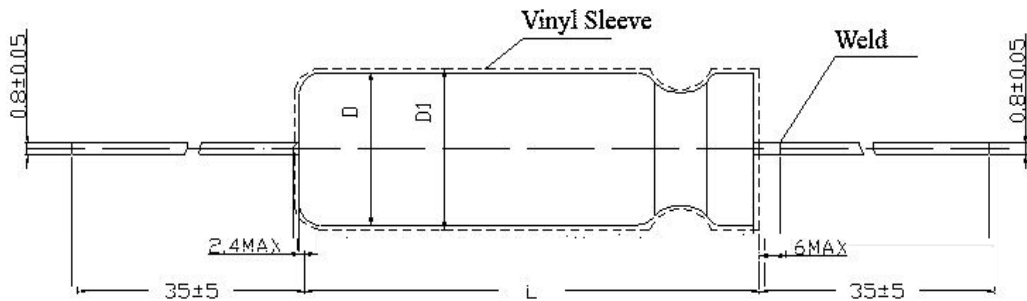

1	4	5	14	5.8	16
2	5	6	16	6.8	18
3	7	8	16	8.8	18
4	10	8	22	8.8	24
5	14	10	22	10.8	24
6	17	10	25	10.8	27
7	20	10	30	10.8	32



Table2 Rated Voltage, derated voltage, capacitance, case code and dissipation factor

Rated Voltage U _R (V)	Derated Voltage U _C (V)	Case Code	Cap. C _R (μF)	tg (%) 25	Rated Voltage U _R (V)	Derated Voltage U _C (V)	Case Code	Cap. C _R (μF)	tg (%) 25				
6.3	3	1	22	45	25	13	2	47	30				
		1	33	45			2	68	30				
		1	47	45			2	100	40				
		1	68	45			3	150	45				
		2	100	50			4	220	60				
		2	150	50			4	330	60				
		3	220	70			5	470	65				
		3	330	75			6	680	70				
		4	470	95			1	4.7	15				
		4	680	95			1	6.8	20				
		5	1000	100			1	10	20				
		5	1200	120			1	15	25				
		10	5	1			15	40	40	20	1	22	30
				1			22	40			2	33	30
1	33			40	2	47	35						
1	47			45	2	68	30						
1	68			45	3	100	45						
2	100			50	4	150	45						
2	150			60	5	220	45						
3	220			65	5	330	50						
3	330			80	6	470	60						
4	470			85	7	680	80						
4	680			85	1	3.3	10						
16	8	1	4.7	20	50	25	1	4.7	15				
		1	10	30			1	6.8	15				
		1	15	30			1	10	15				
		1	22	35			2	15	15				
		1	33	35			2	22	20				
		1	47	40			2	25	20				
		2	68	40			2	33	25				
		2	100	45			2	39	25				
		3	150	45			3	47	25				
		3	220	70			4	68	35				
		4	330	80			4	100	35				
		4	470	85			5	150	30				
		5	680	90			6	220	35				
		25	13	1			4.7	20	6	330	40		
				1			6.8	20	7	560	50		
1	10			20									
1	15			20									
1	22			25									
1	33			25									

